



Screen Repair - Huawei Honor 8

Replacing the LCD + Glass on a Huawei Honor 8

Written By: Nihoul Victor





TOOLS:

- [iSesamo Opening Tool](#) (1)
- [Phillips Screwdriver PH1](#) (1)
- [Plastic spatula](#) (1)



PARTS:

- [Full screen for Honor 8](#) (1)

Step 1 — Remove the rear window



- Heat the parts highlighted in red on the back of the phone with a hair dryer / thermal scrubber
- **Caution: edges must be hot, not hot**
- Then insert the iSesamo gently between the two edges (see picture)
- Once the iSesamo is inserted, make the contour to remove the glue
- **WARNING: DO NOT GO ISESAMO ON THE GREEN-LINED PART**

Step 2 — Disconnect the rear window



- Remove the screw on the metal cover that protects the web from the impression sensor
- Remove the web from the impression sensor with a spatula in plastic

Step 3 — Remove the protection from the motherboard




- Remove the 16 screws using the Phillips screwdriver
- With the iSesamo remove the protection from the motherboard

Step 4 — Peel off the battery




- Remove the 2 sheets highlighted in red
- Carefully peel off the battery using a playing card or credit card

Step 5 — Prepare to take off the screen

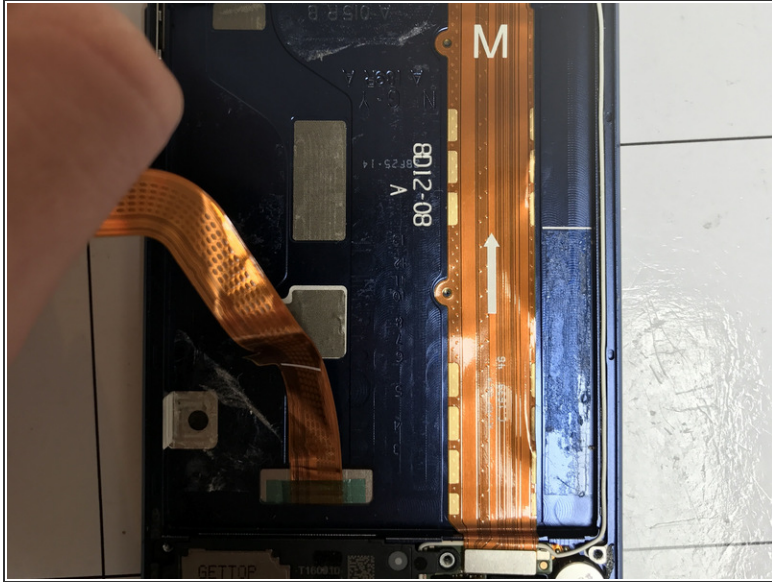

- Peel off the tablecloth on the screen
- Heat the edges of the screen as in step 1

Step 6 — Peel off the screen

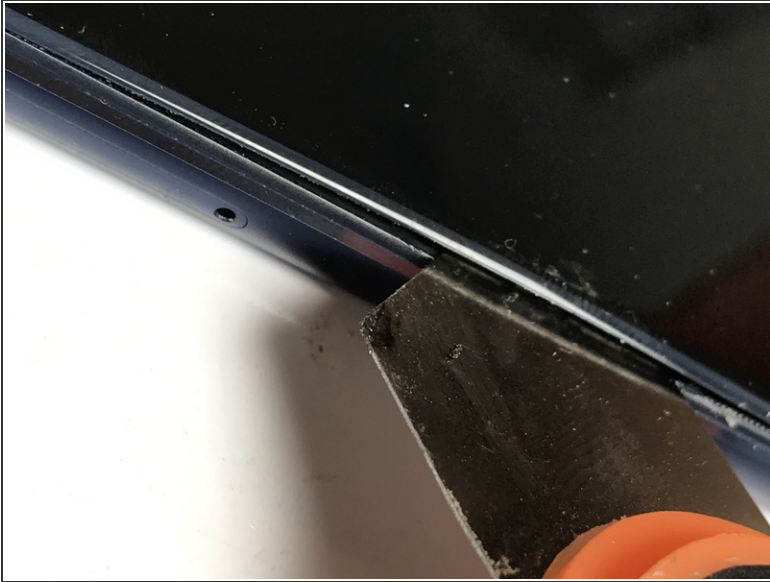

- Insert the iSesamo between the display and the chassis
- Make sure to pass the iSesamo **under** the white plate of the screen (view the photo)
- Go around the phone.
- *Note that the operation may be more complicated depending on the level of breakage of the screen*

Step 7 — Cleaning the chassis



- Carefully remove glass lenses and adhesive on chassis

Step 8 — Paste the new screen



- Glue the screen to the chassis by passing the sheet through the hole provided for this purpose

Pour ré assembler votre appareil, suivez les instructions dans l'ordre inverse :)

This document was last generated on 2017-08-05 07:28:14 PM.